


# TECHNICAL DATA SHEET

## ANZA X6 PA NoLoss

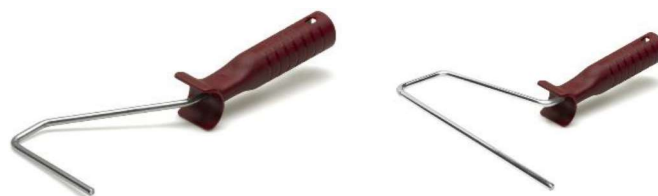

### PRODUCT DESCRIPTION

X6 PA NoLoss is an endless polyamide roller range available in following dimensions:

- Dimensions: 10 cm mini, 15 cm mini, 18 cm – and 25 cm maxi stick system and 41,5 cm double frame handle. Requires standard mini handles in 6 mm dimension and maxi handles in 8 mm dimension (on the steel thread)
- Pile height 13 mm. Specially processed in finish line for high pick-up and release capacity, and high spreading rate without holidays
- Withstands strong solvents

### TYPICAL USE

For use in high viscosity and high build coatings(mastic) and passive fire protection products. Provides an even coverage without holidays and no fibre loss. *Not suitable for top coat*

Make it possible achieve the recommended paint thickness and wanted finish and coverage after paint suppliers' recommendations

- **Typical achieved WFT in high build coatings (mastic): 200-300 microns**
- **Typical achieved WFT in PFP (passive fire protection): 500-800 microns**

*Tested and recommended by Jotun for Jotamastic Smart Pack HB.*